JioLux

LIGHTING, ENGINEERED WITH ELEGANCE

TECHNICAL DATASHEET

JL-TR-1184

Magnetic, Track & Linear Systems

Linear Architectural Luminaire 661

Linear Series | Architectural Mount | IP20 | 3-Year Warranty

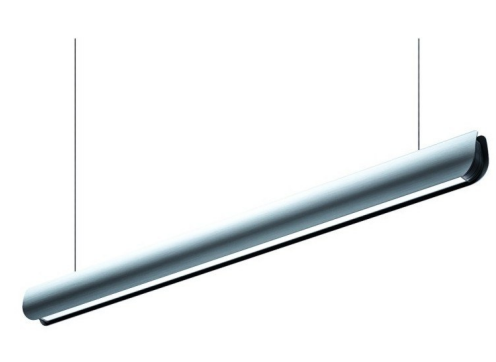

ARCHITECTURAL OVERVIEW

Linear Series - Model 661 by JioLux Architectural

POWER **See Spec**	LUMINOUS FLUX **High Output**
COLOR TEMP **3000K / 4000K**	PROTECTION **IP20**
CRI / OPTICS **Ra >=90**	WARRANTY **3 Years**

TECHNICAL SPECIFICATIONS

Model / SKU	JL-TR-1184	**Ingress Protection**	IP20
Collection	Magnetic, Track & Linear Systems	**Input Voltage & Freq.**	220-240V | 50/60Hz
Power Consumption	On Request	**Dimming / Control**	On/Off (DALI-2 Optional)
Luminous Output	On Request	**Mounting Type**	Architectural Mount
System Efficacy	High Efficacy LED	**Housing & Finish**	Aluminum - Matte White / Archite
Color Temperature (CCT)	3000K / 4000K	**Dimensions (mm)**	Refer to Dimensional Chart
Color Rendering Index	Ra >=90	**Cut-Out Size (mm)**	N/A
Beam Angle / Optics	Architectural Optics	**Rated Lifespan & Warranty**	50,000 Hrs (L70) | 3 Years

PROJECT SPECIFICATION & ENGINEERING SUPPORT

Custom CCT, DALI-2 / Casambi dimming, emergency battery kits, and DIALux photometric files (IES/LDT) are available on project request.

NICEWAY LIGHTING

ADD: Dragon Mart
AL Aweer.Dubai-U.A.E
Tel:00971-4-3687379
00971-55-1537899
Po.Box:299050
SHOP NO:FAA26.27.28.29
E-mail:nicewaylighting@gmail.com

SMD LINEAR LAMP



661

Lamp power : 40W
Working voltage : AC85-265V 50/60Hz
Shine angle : 180°
Color temperature : 3000K/4000K/6000K
Color:Sliver gold gray brow
Ambient temperature : -20℃~+40℃
Lamp material : AL
Protection grade : IP20
Service life : >50000H
Long:1.1m
In stall ation:messeng wire



LED IP20 F CE RoHS

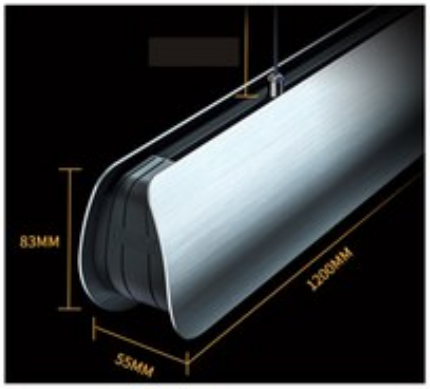

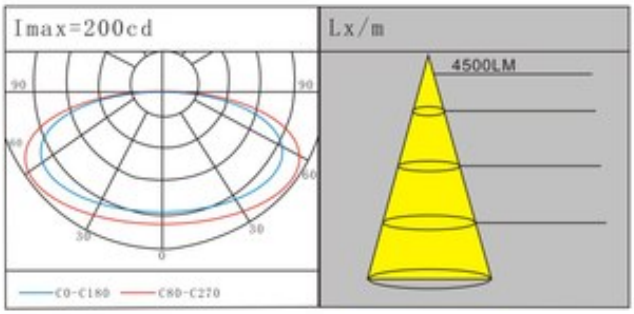

NICEWAY