JioLux

LIGHTING, ENGINEERED WITH ELEGANCE

TECHNICAL DATASHEET

JL-DL-1382

Downlights & Architectural Ceiling

Panel Lighting Architectural Luminaire 13001Y-M

Panel Lighting Series | Architectural Mount | IP20 | 3-Year Warranty



ARCHITECTURAL OVERVIEW

Panel Lighting Series - Model 13001Y-M by JioLux Architectural

POWER **See Spec**	LUMINOUS FLUX **High Output**
COLOR TEMP **3000K / 4000K**	PROTECTION **IP20**
CRI / OPTICS **Ra >=90**	WARRANTY **3 Years**

TECHNICAL SPECIFICATIONS

Model / SKU	JL-DL-1382	**Ingress Protection**	IP20
Collection	Downlights & Architectural Ceili	**Input Voltage & Freq.**	220-240V | 50/60Hz
Power Consumption	On Request	**Dimming / Control**	On/Off (DALI-2 Optional)
Luminous Output	On Request	**Mounting Type**	Architectural Mount
System Efficacy	High Efficacy LED	**Housing & Finish**	Aluminum - Matte White / Archite
Color Temperature (CCT)	3000K / 4000K	**Dimensions (mm)**	Refer to Dimensional Chart
Color Rendering Index	Ra >=90	**Cut-Out Size (mm)**	N/A
Beam Angle / Optics	Architectural Optics	**Rated Lifespan & Warranty**	50,000 Hrs (L70) | 3 Years

PROJECT SPECIFICATION & ENGINEERING SUPPORT

Custom CCT, DALI-2 / Casambi dimming, emergency battery kits, and DIALux photometric files (IES/LDT) are available on project request.

ADD: Dragon Mart 1
AL Aweer.Dubai-U.A.E
Tel:00971-4-5750609
00971-55-8635578
Po.Box:299050
SHOP NO: ST06
E-mail:nicewaylighting@gmail.com

SMD PANEL LIGHT




13001Y-M

Lamp power : 30W
Working voltage : AC85-265V 50/60Hz
Shine angle : 120°
Color temperature : 3000K/6000K
Color:WH
Ambient temperature : -20℃~+40℃
Lamp material : AL
Protection grade : IP20
Service life : >50000H





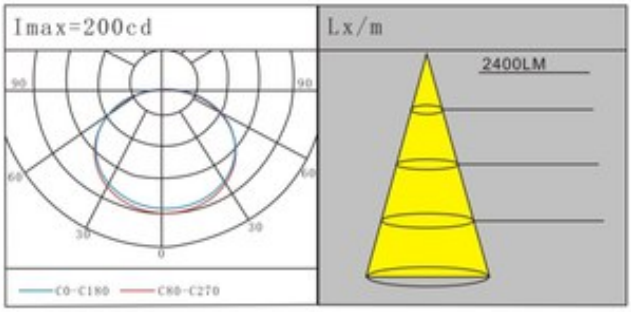

NICEWAY